



Note: Histogram, Vector Scope and Waveform cannot be displayed at the same time.

JVC's DT-V24G2 is a versatile LCD production monitor designed for field, studio and broadcast image evaluation. Its 10-bit panel and wide gamma range make it ideal for critical image evaluation.

### Highlights

#### High Picture Quality

The DT-V24G2 reproduces highly accurate colors in native 1920 x 1080 resolution. The two most critical factors, gamma and grey-scale gradation, have been improved to meet the demands of production studios and broadcast networks.

- **High 1500:1 Contrast Ratio 10-bit IPS (In-Plane Switching) Panel:** The monitor is equipped with a 10-bit IPS LCD panel, which surpasses the EBU Class 2 requirements in terms of color space, gamma and gradation and is capable of reproducing 1.073 billion colors. It also offers a contrast ratio of 1500:1, wide gamut, and wide viewing angles of 178°/178°.
- **Analog-based Picture-quality Evaluation Technology plus Contour Enhancer Technology** to help eliminate digital aliasing to make pictures look more natural.
- **Optimized I-P conversion** maintains sharp and clear images.
- **Gamma and White Balance adjustments** are set before leaving the factory to maintain quality control for all models.
- Accurate color reproduction: **Individual Matrix Parameters** assigned for HD and SD input signals plus EBU100% equivalent color spectrum.

#### Connectivities

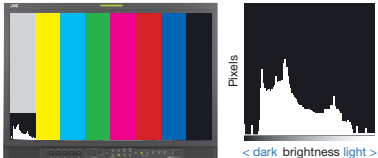
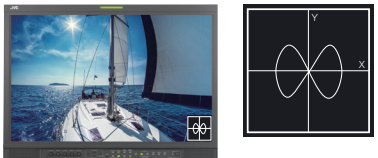
- **3G-SDI & Dual Link:** 1080p uncompressed digital video data transmitted at a maximum rate of 60 frames/sec. at 3 GB/sec. can be input with two HD-SDI inputs. It is also compatible with Dual Link.

##### 3G-SDI Input Format

|           |                             |
|-----------|-----------------------------|
| 3G A-1    | Level A mapping structure 1 |
| 3G A-2    | Level A mapping structure 2 |
| 3G A-3    | Level A mapping structure 3 |
| 3G A-4    | Level A mapping structure 4 |
| 3G B-DS1  | Level B data stream 1       |
| 3G B-DS2  | Level B data stream 2       |
| 3G B-DUAL | Level B DUAL LINK           |

Refer to the rear page for a list of connectors and compatible video signal formats.

#### Assist Functions for Professionals

- **Histogram [NEW]:** Displays the number of pixels on the vertical axis, and brightness of the video on the horizontal axis.
 
- **Lissajous Meter [NEW]:** Displays coherence between two audio channels, which useful in showing the stereo field of a signal and possible phase issues.
 
- **Waveform:** Displays images by detecting brightness signal from video, component and SDI signals. Confirmation of individual color signal level for R/G/B, Y/Pb/Pr, and Y/Cb/Cr. At-a-glance peak brightness with Over-level function.
- **Vector Scope:** Simple checking of hue and saturation of video signal can be detected and displayed. Work with video, component, SDI (SD/HD) input signals.
- **Audio Level Meter:** Allows checking the status of HD-SDI embedded audio up to 16 ch inputs by displaying the channel number, reference and over levels, and peak hold.
- **Array of Markers and Indicators:** Area markers, aspect ratios, safety markers, and aspect switching, as well as screen check function, and two tally (R and G) lamps.
- Equipped with **4 Gamma Preset Modes**
- Assign customized function to F1 and F2 buttons with **Convenient Function Keys**

# DT-V G Series

## 24" Multi-Format LCD Monitor



- Built-in Histogram, Waveform, Vector Scope, Zebra
- Built-in Audio Level Meter up to 16ch/Lissajous Meter
- Enable to preset 3 picture settings such as Gamut or Gamma
- IMD (in monitor display)

### Other features

- Color Temperature settings (9,300K, 6,500K, 5,600K or User mode)
- IP modes: Normal, Field, and Cinema (24p)
- Pixel-by-pixel (1:1) display
- Time code display (SDI)
- Built-in stereo speaker
- Tilttable stand with 2-way installation capability

### Rear terminals



### Front Panel Controls



### Input format

✓: Compatible  
—: Not compatible

| No. | Signal name    | Input Terminal |       |                         |        |           |      |
|-----|----------------|----------------|-------|-------------------------|--------|-----------|------|
|     |                | Video          | COMP. | 3G/HD/SD SDI (IN1, IN2) |        |           | HDMI |
|     |                |                |       | SD/HD                   | 3G-SDI | DUAL LINK |      |
| 1   | NTSC           | ✓              | —     | —                       | —      | —         | —    |
| 2   | NTSC 4:43      | ✓              | —     | —                       | —      | —         | —    |
| 3   | PAL-M          | ✓              | —     | —                       | —      | —         | —    |
| 4   | PAL60          | ✓              | —     | —                       | —      | —         | —    |
| 5   | PAL            | ✓              | —     | —                       | —      | —         | —    |
| 6   | PAL-N          | ✓              | —     | —                       | —      | —         | —    |
| 7   | SECAM          | ✓              | —     | —                       | —      | —         | —    |
| 8   | B/W50          | ✓              | —     | —                       | —      | —         | —    |
| 9   | B/W60          | ✓              | —     | —                       | —      | —         | —    |
| 10  | 480/60i        | —              | ✓     | —                       | —      | —         | ✓    |
| 11  | 480/59.94i     | —              | ✓     | —                       | —      | —         | ✓    |
| 12  | 576/50i        | —              | ✓     | —                       | —      | —         | ✓    |
| 13  | 480/60p        | —              | ✓     | —                       | —      | —         | ✓    |
| 14  | 480/59.94p     | —              | ✓     | —                       | —      | —         | ✓    |
| 15  | 576/50p        | —              | ✓     | —                       | —      | —         | ✓    |
| 16  | 640x480/60p    | —              | ✓     | —                       | —      | —         | ✓    |
| 17  | 640x480/59.94p | —              | ✓     | —                       | —      | —         | ✓    |
| 18  | 720/60p        | —              | ✓     | ✓                       | ✓      | —         | ✓    |
| 19  | 720/59.94p     | —              | ✓     | ✓                       | ✓      | —         | ✓    |
| 20  | 720/50p        | —              | ✓     | ✓                       | ✓      | —         | ✓    |
| 21  | 720/30p        | —              | ✓     | ✓                       | ✓      | —         | ✓    |
| 22  | 720/29.97p     | —              | ✓     | ✓                       | ✓      | —         | ✓    |
| 23  | 720/25p        | —              | ✓     | ✓                       | ✓      | —         | ✓    |
| 24  | 720/24p        | —              | ✓     | ✓                       | ✓      | —         | ✓    |
| 25  | 720/23.98p     | —              | ✓     | ✓                       | ✓      | —         | ✓    |
| 26  | 1080/60i       | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 27  | 1080/59.94i    | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 28  | 1035/60i       | —              | ✓     | ✓                       | ✓      | —         | ✓    |
| 29  | 1035/59.94i    | —              | ✓     | ✓                       | ✓      | —         | ✓    |
| 30  | 1080/50i       | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 31  | 1080/60p       | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 32  | 1080/59.94p    | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 33  | 1080/50p       | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 34  | 1080/30p       | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 35  | 1080/29.97p    | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 36  | 1080/25p       | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 37  | 1080/24p       | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 38  | 1080/23.98p    | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 39  | 1080/30PsF     | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 40  | 1080/29.97PsF  | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 41  | 1080/25PsF     | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 42  | 1080/24PsF     | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |
| 43  | 1080/23.98PsF  | —              | ✓     | ✓                       | ✓      | ✓         | ✓    |

Note: PC signals are compatible with major formats. The monitor is capable of displaying 2048 x 1080/24p (DCI 2K) signal.

- Assign favorite items to Convenient Function Keys
- WUXGA resolution: 1920 x 1200 pixels
- 10-bit IPS panel with 1.073 billion color reproduction
- Supports the EIA/CEA-708 and EIA/CEA-608 SDI closed captioning standards (only North America model)

### Specifications

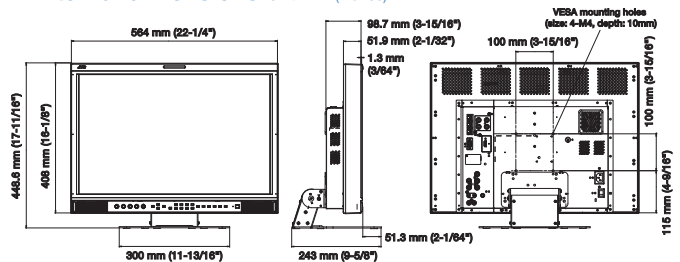
|                               |  |   |
|-------------------------------|--|---|
| Model                         | DT-V2462   |   |
| Type                          | Multi-format LCD monitor   |   |
| Screen Size                   | 24 inches, measured diagonally (Visible: 24 inches/61 cm)  |   |
| Aspect Ratio                  | 16:10  |   |
| LCD Panel                     | 24" diagonal, active matrix TFT  |   |
| Effective Screen Size (W x H) | 518.4 x 324 mm (20-7/16" x 12-13/16")  |   |
| Pixels                        | 1920 x 1200  |   |
| Display Colors                | 1.073 billion  |   |
| Viewing Angle                 | Horizontal / Vertical  | 178° / 178°   |
| Brightness (typ.)             | 400 cd/m <sup>2</sup>  |   |
| Contrast Ratio (typ.)         | 1500:1   |   |
| Applicable Standard           | 3G SDI (Ready): SMPTE424M/SMPTE425M; DUAL LINK HD SDI (Ready): SMPTE372M; HD SDI: BTA S-004C, SMPTE292M; SD SDI: ITU-R BT.656: 525/625, SMPTE299M: 525, EMBEDDED AUDIO: SMPTE299M, SMPTE272M     |   |
| Audio Output                  | Internal: 1.0 W ± 1.0 W (L/R)  |   |
| Environmental Conditions      | Operating temperature  | 5°C to 35°C (41°F to 95°F)                          |
|                               | Operating humidity   | 20% to 80% (non condensing)                         |
|                               | Storage temperature  | -20°C to 60°C                                       |
| Energy Efficiency Class       | C  |   |
| Power Requirements            | AC 120 V/220 V - 240 V, 50/60 Hz   |   |
| Rated Current                 | North America  | 0.72 A (AC 120 V)                                   |
|                               | Europe   | 0.42 A (AC 220 - 240 V)                             |
| Power Consumption             | On-mode: 38.9 W, Stand-by mode: 0.29 W, Annual Energy Consumption: 57 kWh/year*  |   |
| Dimensions (WxHxD)            | With stand   | 564 x 448.6 x 243 mm (22-1/4" x 17-11/16" x 9-5/8") |
|                               | Without stand  | 564 x 408 x 98.7 mm (22-1/4" x 16-1/8" x 3-15/16")  |
| Weight                        | With stand   | 10.6 kg (23.4 lbs.)                                 |
|                               | Without stand  | 7.7 kg (17 lbs.)                                    |
| Provided Accessories          | AC power cord x 1, power cord holder x 1, screw x 2 (for power cord holder), instruction manual x 1, core filter x 1 (only for N. America), CD-ROM (instructions PDF file) x 1 (only for Europe) |   |

\*Energy consumption 57 kWh per year, based on the power consumption of the television operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.

### Input/output connectors

|                  |  |  |
|------------------|--|--|
| Video            | 3G/HD/SD/SDI (Out 2: SWITCHED OUT)   | Digital signal input (compatible with EMBEDDED AUDIO signals): 1 line switched out, BNC connector x 1              |
|                  | 3G/HD/SD SDI (OUT 1)   | Digital signal input (compatible with EMBEDDED AUDIO signals): 1 line, BNC connector x 1                           |
|                  | 3G/HD/SD SDI (IN 1)  | Digital signal input (compatible with EMBEDDED AUDIO/DUAL LINK signals): Auto detection, 2 lines BNC connector x 2 |
|                  | 3G/HD/SD SDI (IN 2)  |  |
|                  | Component (Y, PB/B-Y, PR/R-Y)  | IN: 1 Line<br>Y: 1 V (p-p), 75 ohms (with sync)<br>PB/B-Y, PR/R-Y: 0.7 V (p-p), 75 ohms                            |
| HDMI             | IN: x1 (Compatible with HDCP)  |  |
| VIDEO            | Composite video signal input/output: 1 line, BNC x 2, 1 V (p-p), 75 ohms (IN and OUT are connected with a bridge connection. Auto termination) |  |
| Audio            | AUDIO ASSIGN (IN 1)  | Analog audio signal input: 2 lines, RCA connector x 2, Stereo mini jack x 1, 500 mV (rms), high impedance          |
|                  | AUDIO ASSIGN (IN 2)  |  |
|                  | AUDIO ASSIGN (MONITOR OUT)   | Analog audio signal output: 1 line, RCA x 2, 500 mV (rms)  |
| External Control | MAKE/TRIGGER   | RJ-45  |
|                  | RS-485   | RJ-45  |
|                  | RS-232C  | D-sub (9-pin)  |

### External dimensions Unit: mm (inches)



E.E. & O.E. Design and specifications subject to change without notice.  
All TV screen pictures are simulated. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. HDCP stands for High-bandwidth Digital Content Protection, a copy protection technology of high reliability licensed by Digital Content Protection, LLC. All brand or product names may be trademarks and/or registered trademarks of their respective owners. Any rights not expressly granted herein are reserved.  
Copyright © 2016, JVCKENWOOD Corporation. All Rights Reserved.

# JVCKENWOOD

DISTRIBUTED BY